



TECHNOLOGY FOR THE COMFORT OF YOUR HOME


NEW

VITA

A+++



VOICE CONTROL

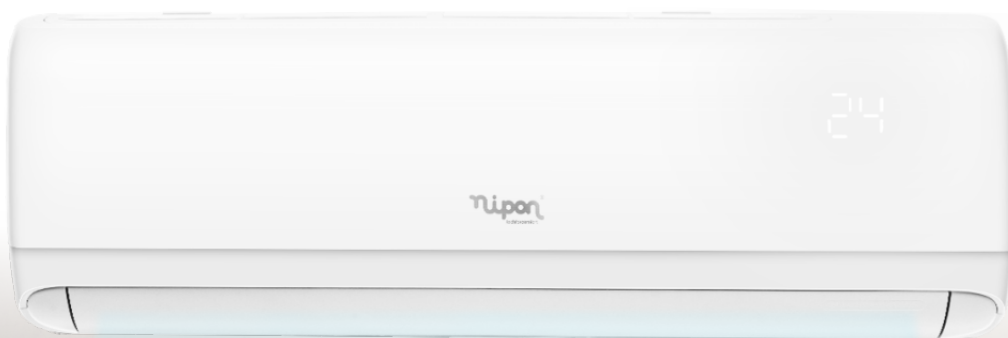

Wall-Mounted Mono-split Air Conditioning **VITA**
LIVE COMFORT WITH VITA

"Turn on the
air conditioning"



works with the
Google Assistant
amazon alexa

5 YEARS
WARRANTY
3 years full warranty
+ 2 years on parts


www.niponcomfort.com

RESIDENTIAL LINE

WALL-MOUNTED MONO-SPLIT Air Conditioning **VITA**

VITA air conditioning units, with their compact and minimalist design, ensure comfort and quality in any room. With A+++ energy class, built-in Wi-Fi and a low noise level, they ensure efficiency, ease of use and maximum comfort.

The VITA is equipped with a LED display, Wi-Fi, voice control, an I FEEL function, included infrared remote, optional wired wall control, and an optional door control module (dry contact, for card control).

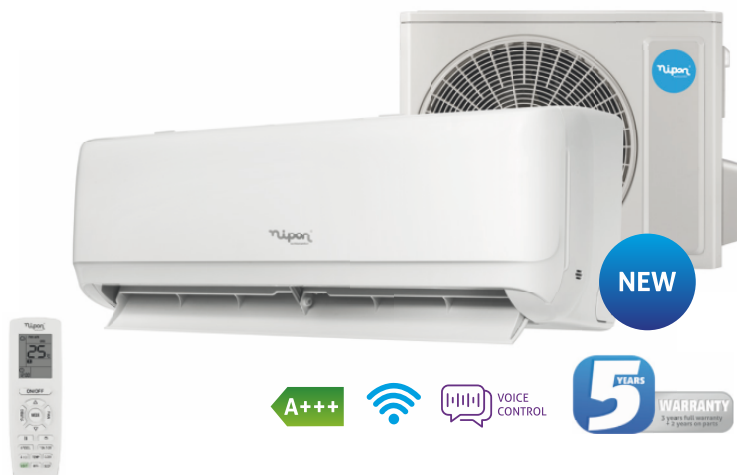

To better understand this symbols refer to page 9.

Wall-mounted VITA Units			VITA09 GA	VITA12 GA	VITA18 GA	VITA24 GA
Cooling	Cooling Capacity	kW	2.5	3.2	4.6	6.2
	Input Power	W	680	991	1353	1786
	Current Input	A	3.1	4.4	6.2	7.6
	SEER	W/W	6.6	6.1	7.2	6.8
	Energy Class		A++	A++	A++	A++
Heating	Heating Capacity	kW	2.8	3.4	5.2	6.5
	Input Power	W	730	916	1334	1645
	Current Input	A	3.2	4.0	6.1	7.6
	SCOP	W/W	5.1	5.1	5.1	5.1
	Energy Class		A+++	A+++	A+++	A+++
Temperature Range IU		°C	16~30	16~30	16~30	16~30
Temperature Range OU (Cooling. / Heating.)		°C	-15~43/-15~24	-15~43/-15~24	-15~43/-15~24	-15~43/-15~24
Power Supply (OU)			220-240V~50Hz, 1Ph			
Electrical Connections	Supply	mm ²	3x2,5 (Unid. Exterior)	3x2,5 (Unid. Exterior)	3x2,5 (Unid. Exterior)	3x2,5 (Unid. Exterior)
	In/Out	mm ²	4x1,5			
Compressor Type			DC INVERTER ROTARY			
Indoor Unit Air Flow(Max./.../Min)		m ³ /h	500/470/430/390/ 320/270/250	590/520/480/400/ 350/320/280	1000/960/870/ 810/720/640/600	1050/900/740/690/640 590/540
Noise Level IU (Max./.../Min)		dB(A)	38/36/34/32/ 28/25/21	41/37/35/33/ 30/26/24	47/45/43/41/ 35/30/23	50/46/44/42/ 40/36/32
Dehumidification		L/h	0.6	1.4	1.8	1.8
Indoor unit	Dimensions (WxDxH)	mm	708x185x260	783x185x260	943x246x333	943x246x333
	Unit's Weight	Kg	7.0	8.0	13.0	13.5
	Package Dim. (WxDxH)	mm	753x332x258	828x332x258	1001x405x322	1001x405x322
Outdoor Unit Air Flow		m ³ /h	1950	1950	2100	2800
Noise Level OU		dB(A)	50	52	55	58
Outdoor unit	Dimensions (WxDxH)	mm	732x330x555	732x330x555	732x330x555	873x376x555
	Unit's Weight	Kg	24.5	25	27.5	36.5
	Package Dim. (WxDxH)	mm	794x376x615	794x376x615	794x376x615	951x431x620
Additional Gas Load		g/m	16	16	16	16
R32 Refrigerant Gas load (up to 5m)		g	480	550	770	1210
Refrigerant Connections	Liquid/Gas Line	inch	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	Line Max Length	m	15	20	25	25
	Line Max Height Dif.	m	10	10	10	10
Code			NI0115309	NI0115312	NI0115318	NI0115324